




SPECIFICATION

Nominal Voltage	12V		
Rated Capacity (3 hour rate)	150 AH		
Dimension	Total Height (top of terminal)	241 mm	9.49"
	Height	241 mm	9.49"
	Length	486 mm	19.13"
	Width	170 mm	6.69"
Weight	Approximately 50 kg / 110.13 lbs		
Capacity 25° C	10 hour rate (17A)	170 AH	
	5 hour rate (31A)	155 AH	
	2 hour rate (65A)	130 AH	
Internal Resistance	Fully charged Battery (25° C)	=<6.0mΩ	
Self-Discharge 25° C	Capacity after 3 month storage	95%	
	Capacity after 6 month storage	85%	
	Capacity after 12 month storage	80%	
Max Discharge Current 25° C	1500A (5S)		
Terminal	Standard	M8	
	Optional		
Charging this battery (Constant Voltage)	Cyclic Application	Initial Charging Current 30A 14.7V (25° C)	
	Float Application	13.7V (25° C)	

CHARGE vs TEMPERATURE

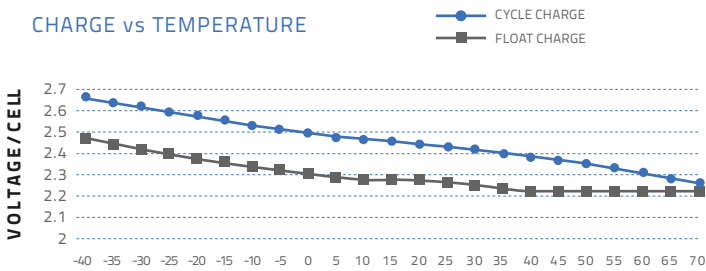

CHARGE vs TEMPERATURE CHART

temperature	-40	-35	-30	-25	-20	-15	-10	-5	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	
Cycle Charge	2.66	2.64	2.62	2.60	2.58	2.56	2.54	2.52	2.50	2.48	2.47	2.47	2.45	2.45	2.43	2.41	2.39	2.37	2.35	2.33	2.31	2.29	2.27	
Float Charge	2.46	2.44	2.42	2.40	2.38	2.36	2.34	2.32	2.31	2.30	2.29	2.29	2.29	2.27	2.26	2.24	2.23	2.23	2.23	2.23	2.23	2.23	2.23	2.23

CONSTANT CURRENT DISCHARGE CHARACTERISTICS: UNITS AMPERES (25° C)

End Voltage per cell	5min	15min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	12h	20h	24h
1.60V	459	293	193	145	100	67.2	51.0	40.7	33.3	31.2	23.3	17.8	15.7	9.78	7.88
1.67V	395	265	179	137	99.1	66.3	49.9	39.8	32.8	29.8	22.5	17.5	15.4	9.61	7.88
1.70V	377	257	173	136	98.3	65.5	49.3	39.0	32.0	28.6	21.8	17.3	15.3	9.52	7.85
1.75V	343	241	166	130	97.4	64.6	48.7	38.3	31.3	27.5	21.2	17.1	15.1	9.35	7.84
1.80V	303	220	160	126	96.9	63.8	47.6	37.6	30.6	27.4	20.8	17.0	14.8	9.18	7.80
1.83V	265	201	148	117	94.4	62.9	46.5	36.0	30.2	26.4	20.0	16.4	14.2	9.10	7.58
1.85V	226	182	136	108	91.8	62.1	44.8	34.7	29.4	25.5	19.3	16.0	13.7	9.01	7.36


DISCHARGE DATA WITH CONSTANT POWER UNITS: WATTS PER CELL (25° C)

End Voltage per cell	5min	15min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	12h	20h	24h
1.60V	757	510.3	349	266	185	134	94.8	76.3	64.9	57.0	43.1	35.1	29.4	18.2	15.3
1.67V	677	475	326	254	185	130	94.6	75.9	63.6	56.3	42.2	34.3	29.4	18.2	15.3
1.70V	655	463	318	252	184	127	92.2	75.4	62.7	56.0	42.1	34.0	29.4	18.2	15.3
1.75V	604	435	307	244	183	122	90.9	74.3	62.2	55.1	41.2	33.65	29.4	18.2	15.2
1.80V	548	401	297	236	183	118	90.1	72.9	61.4	54.3	40.5	33.3	28.5	18.1	15.2
1.83V	484	371	277	221	182	114	89.4	70.5	60.8	52.8	39.2	32.4	27.9	18.1	14.8
1.85V	420	342	257	206	182	109	88.6	68.0	60.1	51.2	37.8	31.6	27.2	17.9	14.5




CYCLE CHARGE CHARACTERISTIC 77°F (25°C)

REGULAR CYCLE CHARGE CHARACTERISTICS 77°F (25°C)

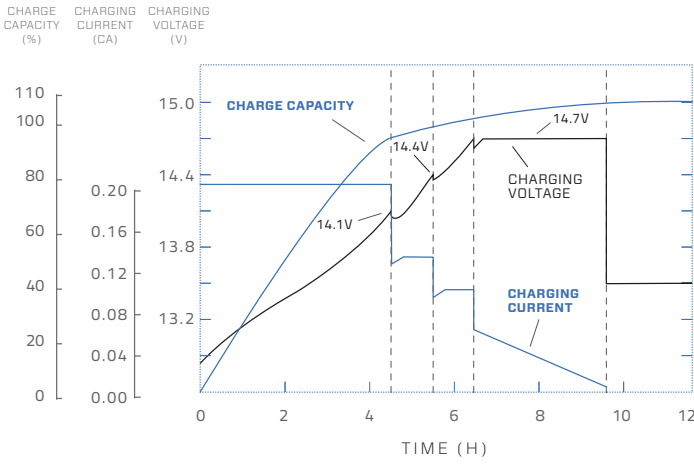


FLOATING CHARGE CHARACTERISTIC (25°C)

FLOATING CHARGE CHARACTERISTICS 77°F (25°C)

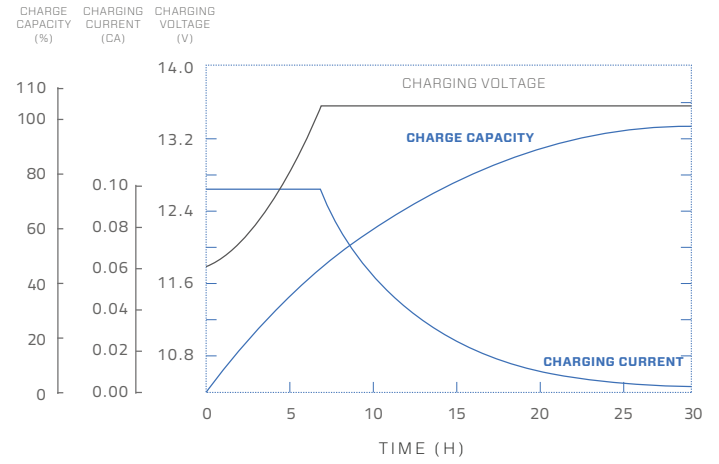


CYCLE LIFE CURVE GRAPH


Cycle life curve graph (25°C)

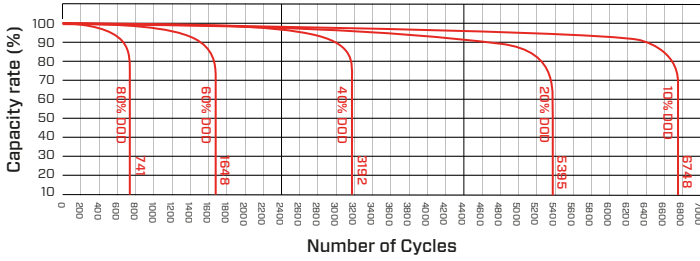


Cycle life curve graph (40°C)

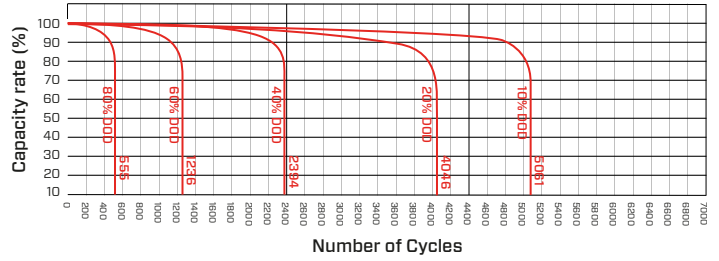


TEMPERATURE AND FLOAT SERVICE LIFE

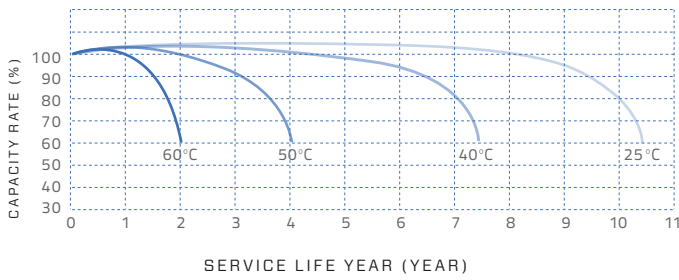

FLOAT SERVICE LIFE CURVE GRAPH

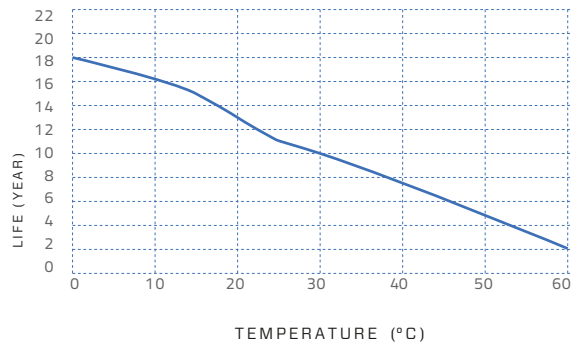

TEMPERATURE & DISCHARGE CAPACITY

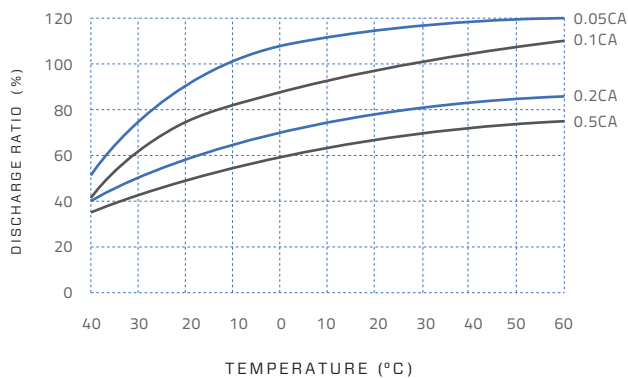

info@greenrhino-energy.com
www.greenrhino-energy.com

www.leadcrystalbatteries.com

