

Product Data Sheet

Male Adaptor (Zinc)

PRODUCT FEATURES

- Material: Die Cast Zinc
- Finishing: Nickel Plated
- Ingress Protection: IP54
- Temperature range: -25°C to +90°C
- Smooth inside for easier wire pulling
- Will not damage conductors
- Provide a grade of water and oil resistant
- Male threaded
- 3 Parts Fitting (Shell & Body & Locknut)

Type A: ZAM



PRODUCT LIST

Part Number	Metric Size	Thread Diameter	Minimum Bore	Across Flats	Thread Length	Length	Packing
CT411ZAM2020	20	20.0	14.8	24.0	10.0	24.5	1000
CT411ZAM2525	25	25.0	18.8	30.0	12.0	28.0	1000
CT411ZAM3232	32	32.0	25.8	36.0	13.0	29.0	1000
CT411ZAM4040	40	40.0	33.8	46.0	15.0	31.5	1000
CT411ZAM5050	50	50.0	41.8	55.0	15.0	33.0	1000

RELATED PRODUCT

CONDUIT	Type GVL	Type PVC-ODL	Type PVC-OD	Type PVC-LSZH
				

all dimensions are nominal value in mm

All images used are for illustrative purposes only. Images are indicative of the quality and style of the specification. Products and specifications are subject to change without notice.

Product Data Sheet

Male Adaptor (Brass)

PRODUCT FEATURES

- Material: Brass
- Finishing: Nickel Plated
- Ingress Protection: IP54
- Temperature range: -25°C to +90°C
- Smooth inside for easier wire pulling
- Will not damage conductors
- Provide a grade of water and oil resistant
- Male threaded
- 3 Parts Fitting (Shell & Body & Locknut)

Type A: MBA



PRODUCT LIST

Part Number	Metric Size	Thread Diameter	Minimum Bore	Across Flats	Thread Length	Length	Packing
CT411MBA2020	20	20.0	14.8	24.0	10.0	24.5	1000
CT411MBA2525	25	25.0	18.8	30.0	12.0	28.0	1000
CT411MBA3232	32	32.0	25.8	36.0	13.0	29.0	1000
CT411MBA4040	40	40.0	33.8	46.0	15.0	31.5	1000
CT411MBA5050	50	50.0	41.8	55.0	15.0	33.0	1000

RELATED PRODUCT

CONDUIT	Type GVL	Type PVC-ODL	Type PVC-OD	Type PVC-LSZH
				

all dimensions are nominal value in mm

All images used are for illustrative purposes only. Images are indicative of the quality and style of the specification. Products and specifications are subject to change without notice.

Product Data Sheet

Female Adaptor (Zinc)

PRODUCT FEATURES

- Material: Die Cast Zinc
- Finishing: Nickel Plated
- Ingress Protection: IP54
- Temperature range: -25°C to +90°C
- Smooth inside for easier wire pulling
- Will not damage conductors
- Provide a grade of water and oil resistant
- Male threaded
- 3 Parts Fitting (Shell & Body & Locknut)

Type A: ZAF



PRODUCT LIST

Part Number	Metric Size	Thread Diameter	Minimum Bore	Across Flats	Thread Length	Length	Packing
CT412ZAF2020	20	20.0	14.8	24.0	10.0	23.5	1000
CT412ZAF2525	25	25.0	18.8	30.0	12.0	28.0	1000
CT412ZAF3232	32	32.0	25.8	36.0	13.0	28.0	1000
CT412ZAF4040	40	40.0	33.8	46.0	15.0	30.5	1000
CT412ZAF5050	50	50.0	41.8	55.0	15.0	32.0	1000

RELATED PRODUCT

CONDUIT	Type GVL	Type PVC-ODL	Type PVC-OD	Type PVC-LSZH
				

all dimensions are nominal value in mm

All images used are for illustrative purposes only. Images are indicative of the quality and style of the specification. Products and specifications are subject to change without notice.

Product Data Sheet

Female Adaptor (Brass)

PRODUCT FEATURES

- Material: Brass
- Finishing: Nickel Plated
- Ingress Protection: IP54
- Temperature range: -25°C to +90°C
- Smooth inside for easier wire pulling
- Will not damage conductors
- Provide a grade of water and oil resistant
- Female threaded
- 2 Parts Fitting (Shell & Body)

Type A: FFB



PRODUCT LIST

Part Number	Metric Size	Thread Diameter	Minimum Bore	Across Flats	Thread Length	Length	Packing
CT412FFB2020	20	20.0	14.8	24.0	10.0	23.5	1000
CT412FFB2525	25	25.0	18.8	30.0	12.0	28.0	1000
CT412FFB3232	32	32.0	25.8	36.0	13.0	28.0	1000
CT412FFB4040	40	40.0	33.8	46.0	15.0	30.5	1000
CT412FFB5050	50	50.0	41.8	55.0	15.0	32.0	1000

RELATED PRODUCT

CONDUIT	Type GVL	Type PVC-ODL	Type PVC-OD	Type PVC-LSZH
				

all dimensions are nominal value in mm

All images used are for illustrative purposes only. Images are indicative of the quality and style of the specification. Products and specifications are subject to change without notice.

Product Data Sheet

Liquid Tight Flexible Conduit Fittings

PRODUCT FEATURES

- Material: Brass
- Finishing: Nickel Plated
- Ingress Protection: IP65
- Temperature range: -25°C to +105°C
- Smooth inside for easier wire pulling
- Will not damage conductors
- Straight, external Male thread
- Multipart compression fitting (Body, Compression Nut, Sealing Ring, Ferrule Grounding Cone, Sealing Washer, Locknut & Insulating Throat)
- Supplied with insulating throat
- High tensile strength
- Chemical and oil resistant
- Corrosion-resistant
- Conforms to EN 61386

Type BLT



PRODUCT LIST

Part Number	Metric Size	Thread Diameter	Minimum Bore	Across Flats	Thread Length	Length	Packing
CT410BLT2020	20	20.0	14.8	28.6	12.0	38.1	1000
CT410BLT2525	25	25.0	18.8	34.9	13.5	42.9	1000
CT410BLT3232	32	32.0	25.8	42.4	17.5	46.0	1000
CT410BLT4040	40	40.0	32.3	53.0	18.0	55.6	1000
CT410BLT5050	50	50.0	39.2	59.0	23.0	66.7	1000

RELATED PRODUCT

CONDUIT	Type PVC-ODL	Type PVC-OD	Type PVC-LSZH	Type PVC-LT
				

all dimensions are nominal value in mm

All images used are for illustrative purposes only. Images are indicative of the quality and style of the specification. Products and specifications are subject to change without notice.


Product Data Sheet

Liquid Tight Flexible Conduit Fittings

PRODUCT FEATURES

- Material: Brass
- Finishing: Nickel Plated
- Ingress Protection: IP66, IP67, IP68 (5bar) & IP69
- Temperature range: -25°C to +105°C
- Smooth inside for easier wire pulling
- Will not damage conductors
- Straight, external Male thread
- Multipart compression fitting (Body, Compression Nut, Nylon Compression Seal, Earthing Ferrule & Insulating Throat)
- Supplied with insulating throat
- High tensile strength
- Chemical and oil resistant
- Corrosion-resistant
- Conforms to EN 61386

Type DLT

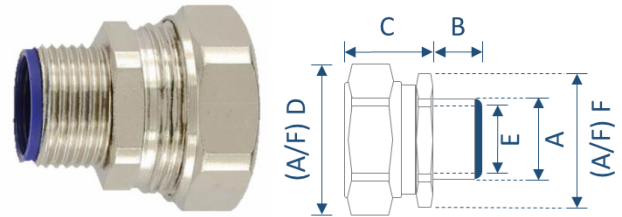

PRODUCT LIST

Part Number	Conduit Metric Size	Thread A	B	C	D	E	F (A/F)
CT414ODLT20	20	M20x1.5	12.0	21.5	29.0	14.5	26.0
CT414ODLT25	25	M25x1.5	14.0	26.5	35.0	18.0	33.0
CT414ODLT32	32	M32x1.5	15.0	30.8	42.0	24.6	40.0
CT414ODLT40	40	M40x1.5	16.0	31.5	52.0	32.7	50.0
CT414ODLT50	50	M50x1.5	18.0	35.0	58.0	37.7	58.0

RELATED PRODUCT

CONDUIT	Type PVC-ODL	Type PVC-OD	Type PVC-LSZH	Type PVC-LT
				

all dimensions are nominal value in mm

All images used are for illustrative purposes only. Images are indicative of the quality and style of the specification. Products and specifications are subject to change without notice.